




RELL
PIPE & JOINT SUPPLY

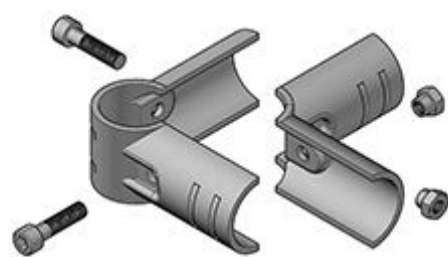

MODULAR RACK NO NEED WELDING

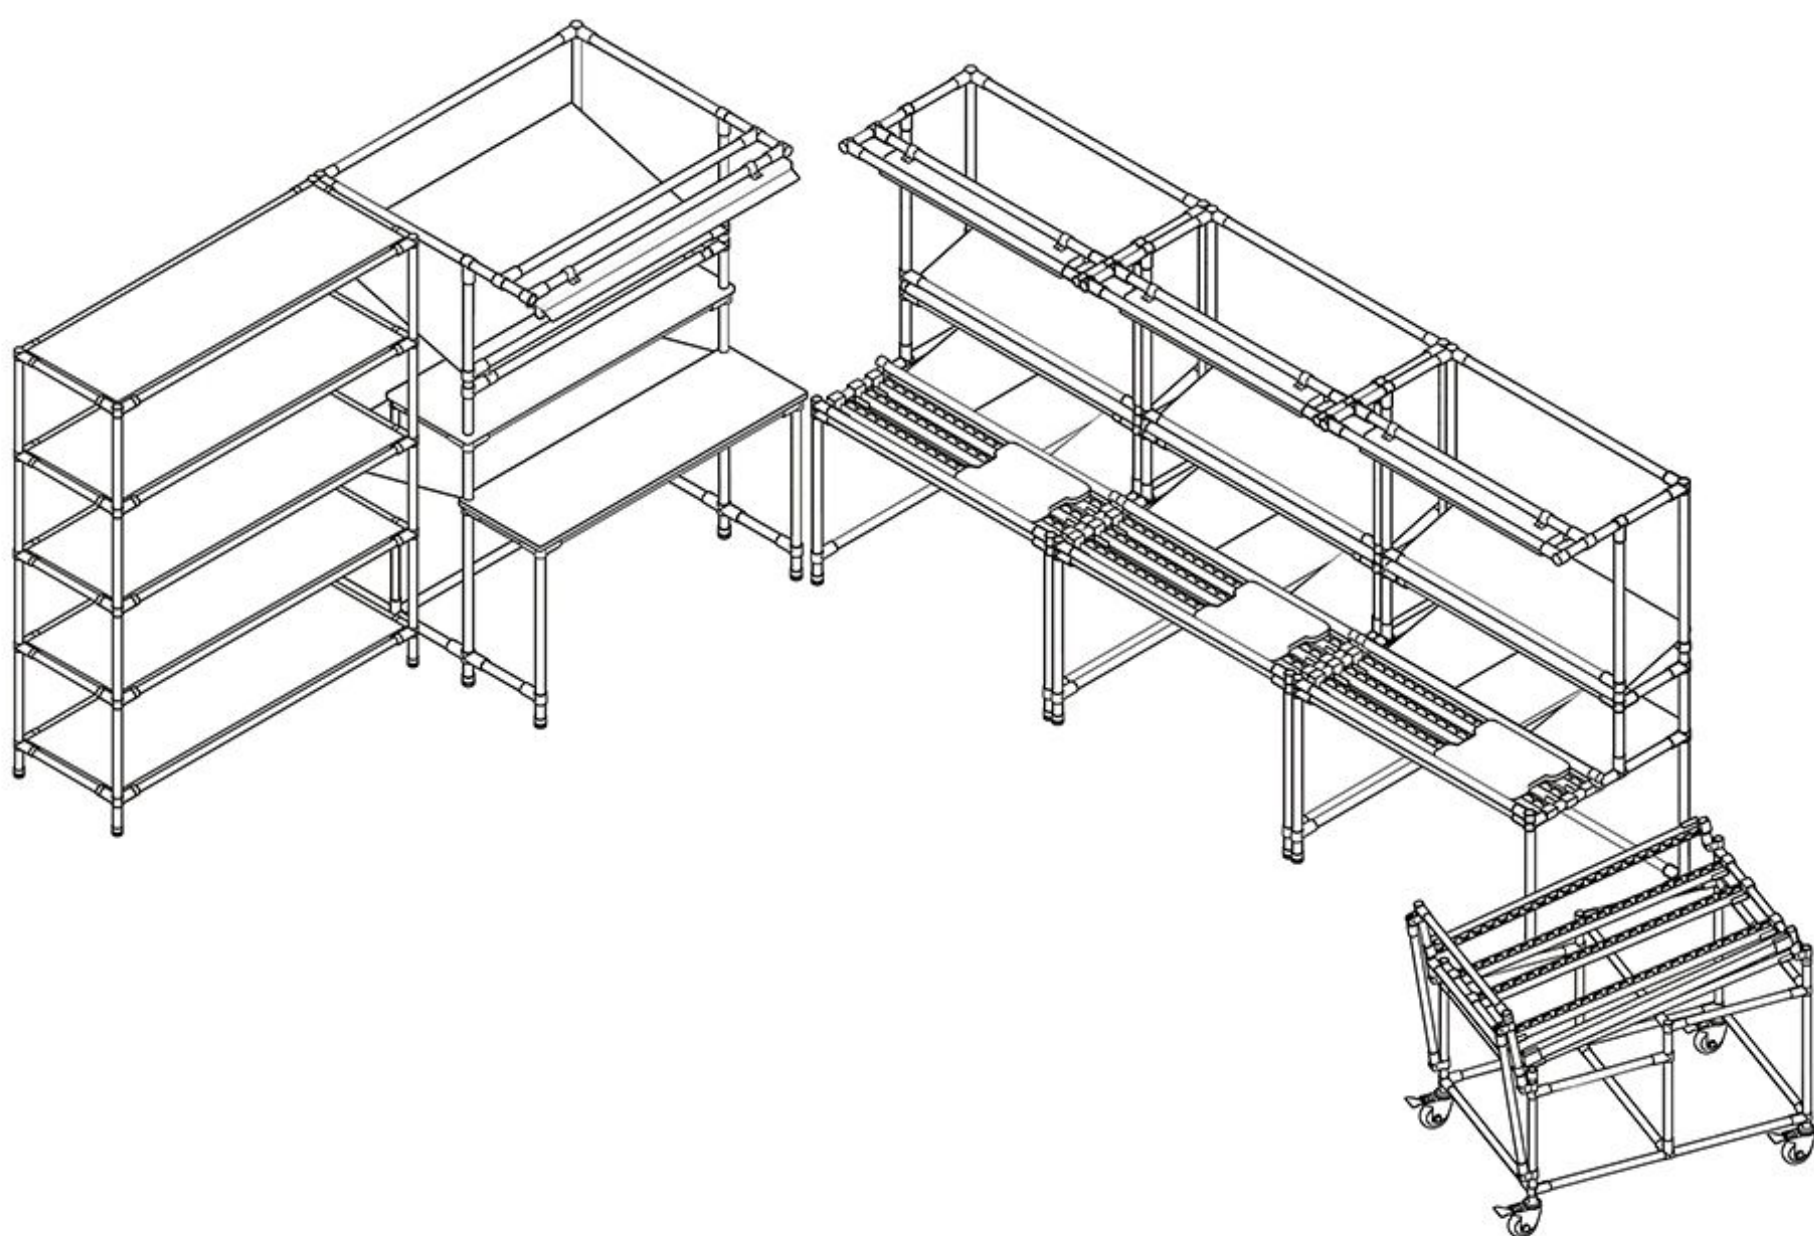

About RELL

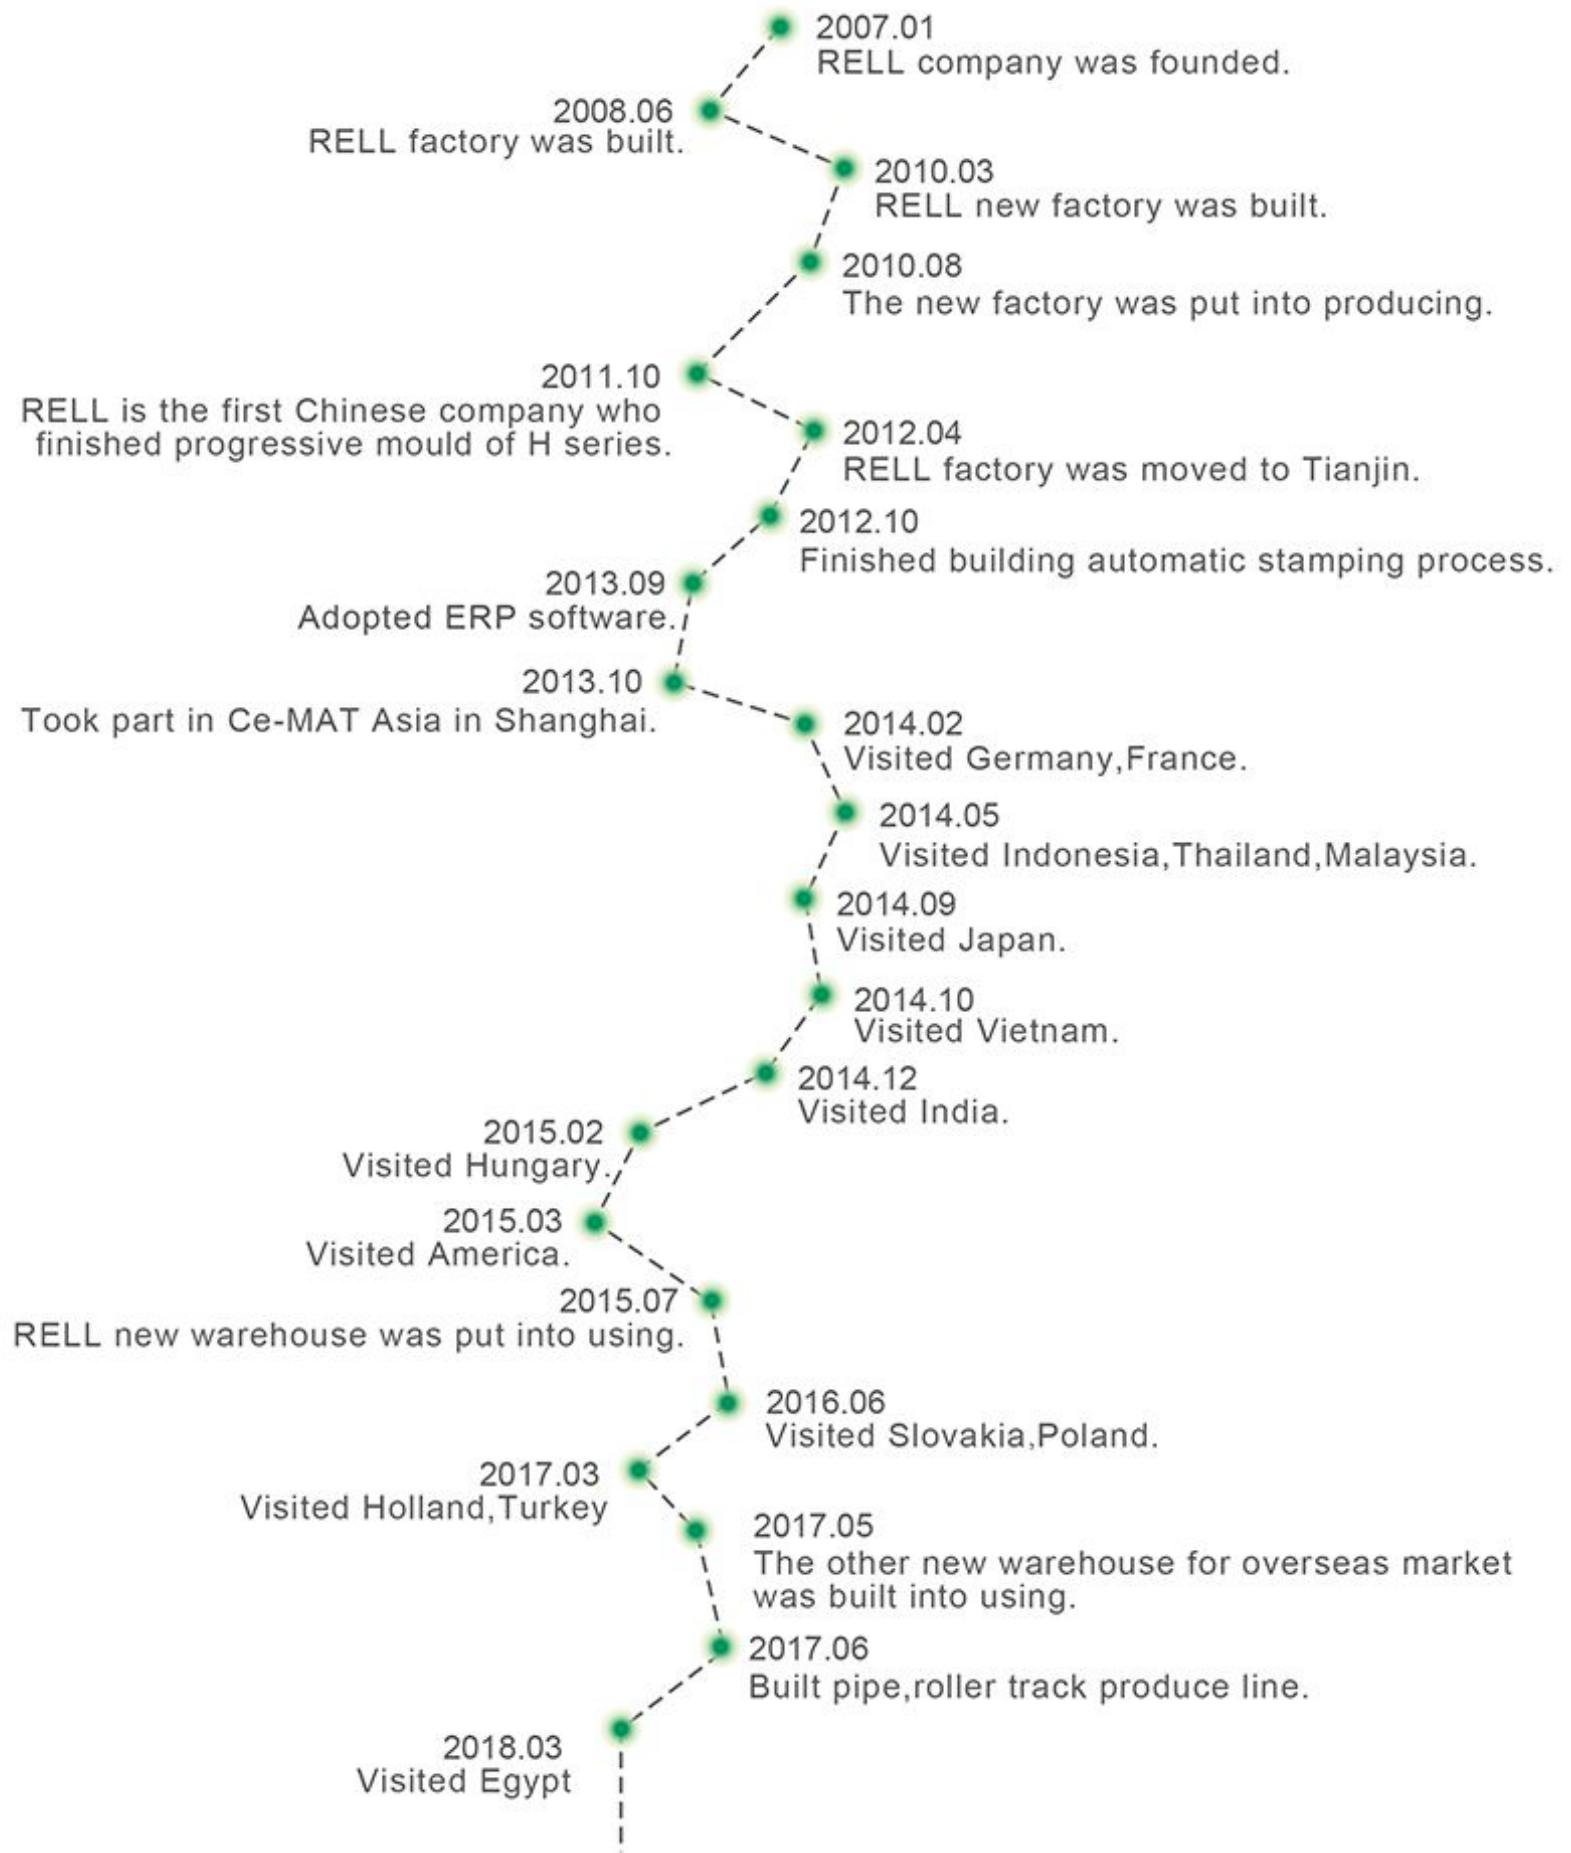

CONTENTS

T	SERIES	PIPES	P01
HJ	SERIES	METAL JOINTS	P05
H	SERIES	METAL JOINTS	P11
P	SERIES	PLASTICS	P17
R	SERIES	ROLLER TRACKS	P21
F	SERIES	METAL ACCESSORIES	P31
L	SERIES	LEVELING FEET	P37
N	SERIES	FASTENERS	P43
C	SERIES	CASTERS	P45
O	SERIES	TOOLS	P49

T Series

PIPES



Unit : mm

Coating Pipe



1. Production Craft

This craft includes single-step and automatic integrated process. Because of the high cost of the first craft, RELI suggests the second one. Moreover, we have successfully researched the automatic integrating pipe craft.

2. Performance and Parameters

Pipe is composed of five parts. It can be provided according to customers' different requirements on performance.

SUS Pipe



1. High Strength & Durability

Surface resistant to light abrasion or contact with metal tools

2. High Oil & Chemical Resistance

High resistance to oil, solvents, bleaches, etc.

3. Non-flammable

Inherently non-flammable

4. Conductive

Inherently conductive

5. Environmental

SUS pipe is fully recyclable

Aluminum Alloy Pipe



1. Environmental

Aluminum pipe achieves a superb recyclability.

2. Weight

Weight reduced by 40% comparing with steel coated pipe.

3. Aesthetic

Alumite treatment allows for "maintenance-free", excellent appearance that lasts for long.

PIPES

T-1PE10U2440-N / T-1ABS10U4000-N



Desc.	Color	Part No.	THK.	m/PC	m/BDL.	Kg/m
Coated Pipe	Blue	T-1PE10U	Φ28 X t 0.9	2.44	19.52	0.629
		T-1ABS10U		4	40	

T-1PEESD10B2440-N / T-1ABSESD10B4000-N



Desc.	Color	Part No.	ESD Pipe	THK.	m/PC	m/BDL.	Kg/m
Coated Pipe	Black	T-1PEESD10B		Φ28 X t 0.9	2.44	19.52	0.629
		T-1ABSESD10B			4	40	

T-1PE10W4000-N / T-1ABS15W4000-N



Desc.	Color	Part No.	THK.	m/PC	m/BDL.	Kg/m
Coated Pipe	White	T-1PE10W	Φ28 X t 0.9	4	40	0.629
		T-1ABS15W	Φ28 X t 1.4			1.070

T-1PE10V4000-N / T-1ABS10V4000-N



Desc.	Color	Part No.	THK.	m/PC	m/BDL.	Kg/m
Coated Pipe	Ivory	T-1PE10V	Φ28 X t 0.9	4	40	0.629
		T-1ABS10V	Φ28 X t 0.9			0.640

T-3SUS201104000-N / T-3SUS201084000-N / T-3SUS201124000-N



Desc.	material	Part No.	ESD Pipe	THK.	m/PC	m/BDL.	Kg/m
SUS Pipe	201	T-3SUS20110		Φ28 X t 0.9	4	40	0.593
SUS Pipe	201	T-3SUS20108		Φ28 X t 0.7			0.464
SUS Pipe	201	T-3SUS20112		Φ28 X t 1.1			0.719

T-3STS409082440-N / T-3STS409084000-N



Desc.	material	Part No.	ESD Pipe	THK.	m/PC	m/BDL.	Kg/m
SUS Pipe	409	T-3STS40908		Φ28 X t 0.7	2.44	19.52	0.464
					4	40	

T-1ABS10DU4000-N



Desc.	Color	Part No.	THK.	m/PC	m/BDL.	Kg/m
Coated Pipe	Dark Blue	T-1ABS10DU	Φ28 X t 0.9	4	40	0.629

T-1PE10DG2440-N / T-1ABS10DG4000-N




Desc.	Color	Part No.	THK.	m/PC	m/BDL.	Kg/m
Coated Pipe	Dark Gray	T-1PE10DG	Φ28 X t 0.9	2.44	19.52	0.629
		T-1ABS10DG		4	40	

T-1PE10Y2440-N / T-1ABS10Y4000-N



Desc.	Color	Part No.	THK.	m/PC	m/BDL.	Kg/m
Coated Pipe	Yellow	T-1PE10Y	Φ28 X t 0.9	2.44	19.52	0.629
		T-1ABS10Y		4	40	

T-1PE10R2440-N / T-1ABS10R4000-N



Desc.	Color	Part No.	THK.	m/PC	m/BDL.	Kg/m
Coated Pipe	Red	T-1PE10R	Φ28 X t 0.9	2.44	19.52	0.629
		T-1ABS10R		4	40	

Unit : mm

T-1



Desc.	Part No.	ESD Pipe	THK.	m/PC	m/BDL.	Kg/m
PPR Coated Pipe	T-1PPR08	T-1PPRES10	Φ28 X t 0.7	4	40	0.522
	T-1PPR10		Φ28 X t 0.9			0.640
	T-1PPR12		Φ28 X t 1.1			0.812
	T-1PPR20		Φ28 X t 1.8			1.250
ABS Coated Pipe	T-1ABS08	T-1ABSESD10	Φ28 X t 0.7	4	40	0.522
	T-1ABS10		Φ28 X t 0.9			0.640
	T-1ABS12		Φ28 X t 1.1			0.812
	T-1ABS20		Φ28 X t 1.8			1.250
PE Coated Pipe	T-1PE08	T-1PEESD10	Φ28 X t 0.7	4	40	0.511
	T-1PE10		Φ28 X t 0.9			0.629
	T-1PE12		Φ28 X t 1.1			0.744
	T-1PE20		Φ28 X t 1.8			1.239

T-3



Desc.	Part No.	ESD Pipe	THK.	m/PC	m/BDL.	Kg/m
SUS Pipe	T-3SUS08		Φ28 X t 0.7	4	40	0.464
	T-3SUS10		Φ28 X t 0.9			0.593
	T-3SUS12		Φ28 X t 1.1			0.719

T-5 (Light-weight)



Desc.	Part No.	ESD Pipe	THK.	m/PC	m/BDL.	Kg/m
Aluminum Alloy Pipe	T-5AL13OX-N		Φ28 X t 1.2	4	40	0.342

T-5A (Light-weight)



Desc.	Part No.	ESD Pipe	THK.	m/PC	m/BDL.	Kg/m
Aluminum Alloy Pipe	T-5AAL13OX-N		Φ28 X t 1.2	4	40	0.361


HJ Series

METAL JOINTS




Unit : mm

HJ-1




H-1 2 pcs
N-1/N-2 1 set

HJ-1A




H-1A 2 pcs
N-1/N-2 1 set

HJ-2




H-2 1 pcs
H-3 1 pcs
N-1/N-2 2 sets

HJ-3




H-2 2 pcs
H-4 1 pcs
N-1/N-2 3 sets

HJ-4




H-4 2 pcs
N-1/N-2 2 sets

HJ-5




H-2 4 pcs
N-1/N-2 4 sets

HJ-6




H-5 2 pcs
H-6 2 pcs
N-1/N-2 2 sets

HJ-6A




H-6 2 pcs
H-6A 2 pcs
N-1/N-2 3 sets

HJ-6B



H-5 2 pcs
N-1/N-2 1 set

HJ-6C




H-6A 2 pcs
N-1/N-2 2 sets

METAL JOINTS




SURFACE : ●BK ●WZ ●NP ●CP ●PC

HJ-7




H-7 2 pcs
N-1/N-2 1 set

HJ-7A



H-7A 2 pcs
N-1/N-2 1 set

HJ-8




H-8 1 pcs
H-9 1 pcs
N-1/N-2 1 set

HJ-9




H-9 2 pcs
N-1/N-2 1 set

HJ-10




H-10 2 pcs
N-1/N-2 1 set

HJ-11




H-11 2 pcs
N-1/N-2 1 set
P-6 1 pcs

HJ-12




H-12 2 pcs
N-1/N-2 1 set
P-6 1 pcs

HJ-13




H-13 2 pcs
N-1/N-2 1 set

HJ-13A



H-13A 2 pcs
N-1/N-2 1 set


HJ-13B




H-13B 2 pcs
N-1/N-2 1 set

Unit : mm

HJ-14

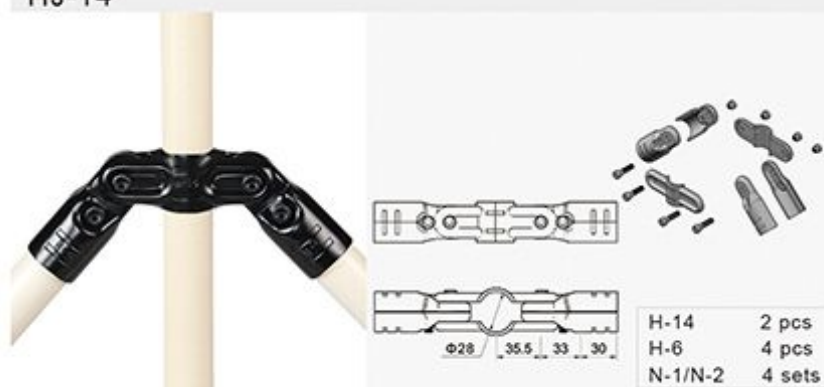

HJ-14A

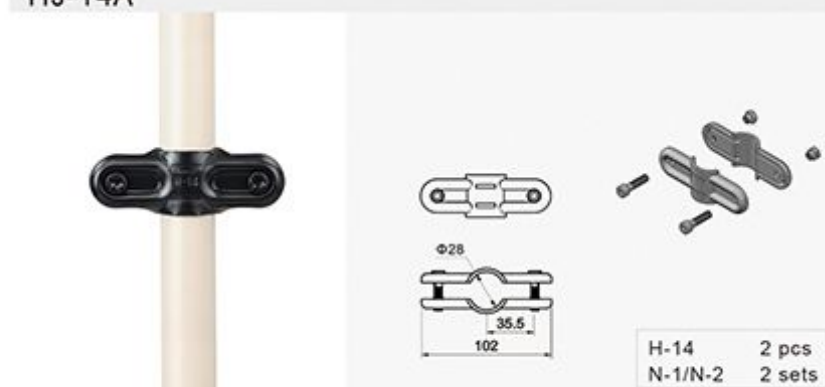

HJ-15



HJ-15A




HJ-17



HJ-19



HJ-20

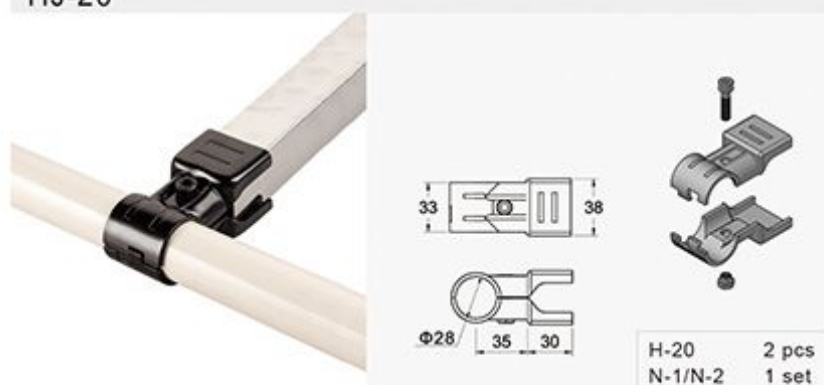

HJ-20A



HJ-21



HJ-23




METAL JOINTS




SURFACE : ●BK ●WZ ●NP ●CP ●PC

HJ-24

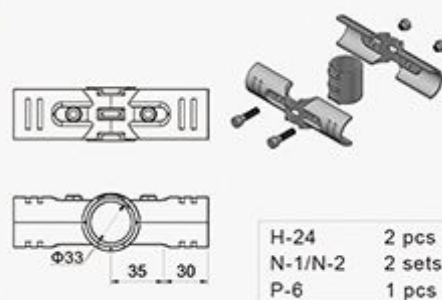


H-24 2 pcs
N-1/N-2 2 sets
P-6 1 pcs

HJ-30

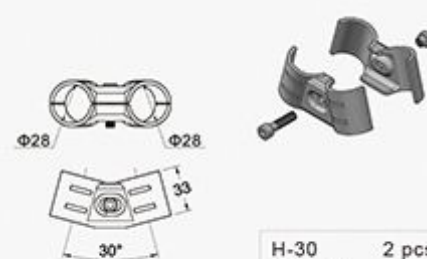


H-30 2 pcs
N-1/N-2 1 set

HJ-45

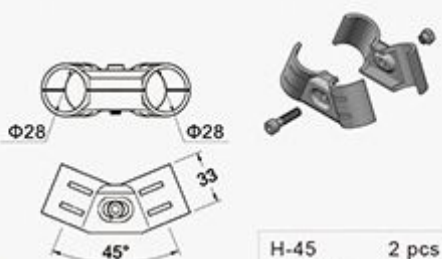


H-45 2 pcs
N-1/N-2 1 set

HJ-60

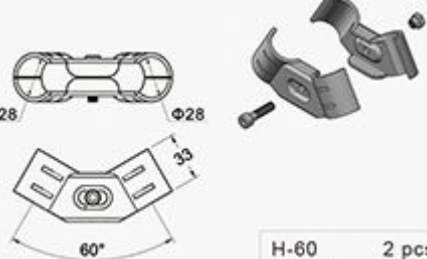


H-60 2 pcs
N-1/N-2 1 set

HJ-90

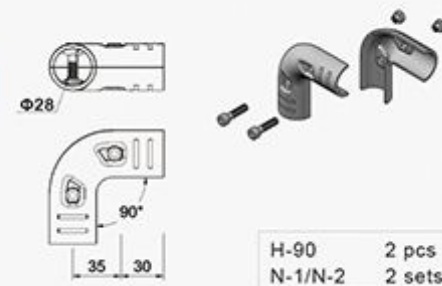

H-90 2 pcs
N-1/N-2 2 sets

HJ-110

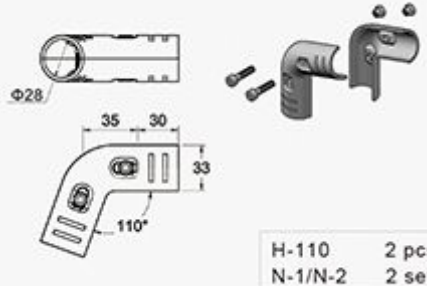


H-110 2 pcs
N-1/N-2 2 sets

HJ-160



H-160 2 pcs
N-1/N-2 2 sets

HJ-180

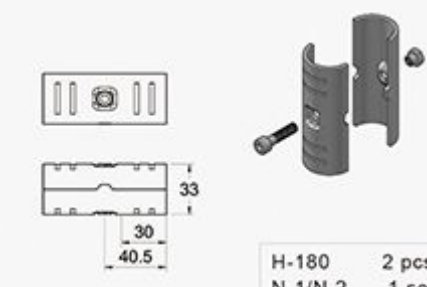

H-180 2 pcs
N-1/N-2 1 set

Unit : mm

HJ-103




HJ-403




HJ-13C



HJ-13D

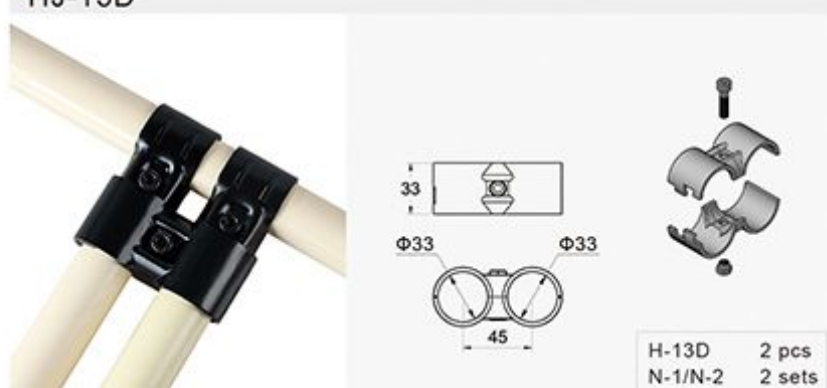

HJ-101

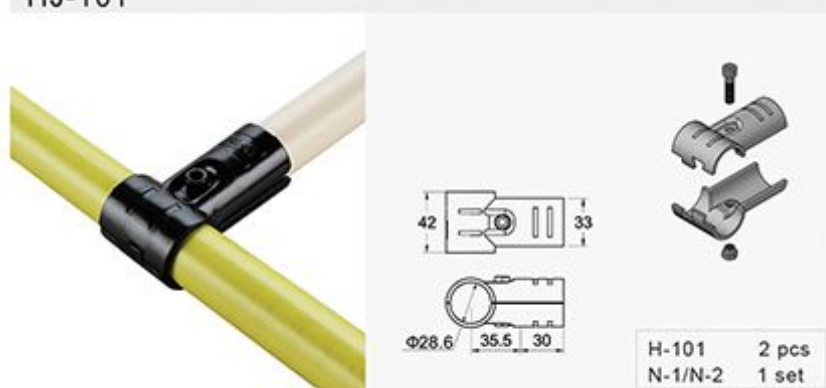


HJ-102




HJ-201




HJ-301

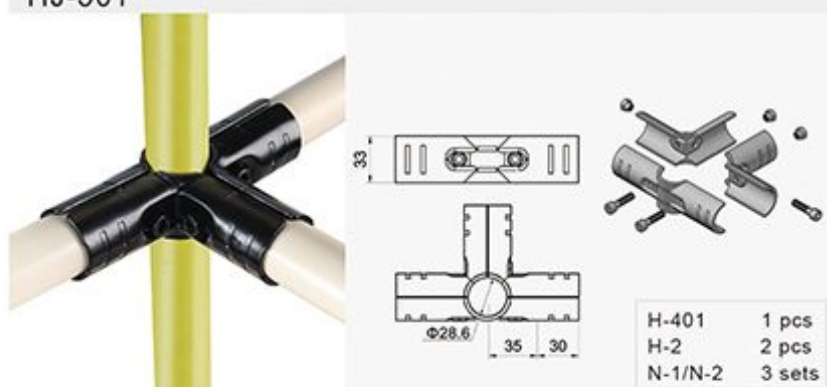

HJ-401

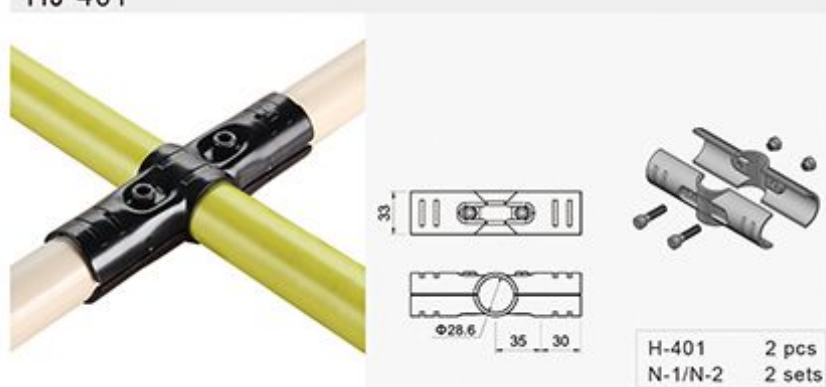


H Series METAL JOINTS

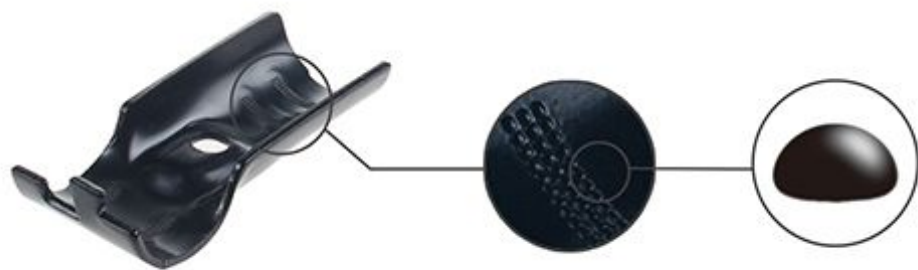


Unit : mm

H-1




THK.	2.3	2.5
Kg/PC	0.061	0.067
PC/CTN	300	300

H-1A




Kg/PC	0.058
PC/CTN	360

H-2




THK.	2.3	2.5
Kg/PC	0.086	0.094
PC/CTN	200	200

H-3 (Ungrip Type)




THK.	2.3	2.5
Kg/PC	0.111	0.120
PC/CTN	80	80

H-3K (Grip Type)




THK.	2.3	2.5
Kg/PC	0.111	0.120
PC/CTN	80	80

H-4




THK.	2.3	2.5
Kg/PC	0.098	0.106
PC/CTN	200	200

H-5




THK.	2.3	2.5
Kg/PC	0.042	0.045
PC/CTN	300	300

H-6




THK.	2.3	2.5
Kg/PC	0.055	0.059
PC/CTN	300	300

H-6A



Kg/PC	0.066
PC/CTN	240

H-7




THK.	2.3	2.5
Kg/PC	0.043	0.048
PC/CTN	200	200

H-7A




Kg/PC	0.040
PC/CTN	300

H-8




Kg/PC	0.067
PC/CTN	240

H-9



Kg/PC	0.062
PC/CTN	330

H-10




Kg/PC	0.054
PC/CTN	300

H-11




Kg/PC	0.060
PC/CTN	280

H-12




Kg/PC	0.063
PC/CTN	240

H-13




Kg/PC	0.053
PC/CTN	300

H-13A




Kg/PC	0.052
PC/CTN	330

H-13B



Kg/PC	0.044
PC/CTN	540

H-14



Kg/PC	0.056
PC/CTN	320

Unit : mm

H-15



Kg/PC	0.038
PC/CTN	400

H-16



Kg/PC	0.046
PC/CTN	400

H-16A



Kg/PC	0.046
PC/CTN	400

H-17



Kg/PC	0.069
PC/CTN	220

H-18



Kg/PC	0.069
PC/CTN	220

H-19


Kg/PC	0.062
PC/CTN	150

H-20


Kg/PC	0.070
PC/CTN	200

H-21


Kg/PC	0.133
PC/CTN	150

H-23


Kg/PC	0.064
PC/CTN	180

H-24



Kg/PC	0.102
PC/CTN	200

METAL JOINTS




SURFACE : ●BK ●WZ ●NP ●CP ●PC

H-30




Kg/PC	0.062
PC/CTN	330

H-45




Kg/PC	0.066
PC/CTN	230

H-60




Kg/PC	0.083
PC/CTN	150

H-90




Kg/PC	0.102
PC/CTN	150

H-110



Kg/PC	0.113
PC/CTN	150

H-160




Kg/PC	0.114
PC/CTN	160

H-180




Kg/PC	0.071
PC/CTN	300


Unit : mm

H-103



Kg/PC	0.073
PC/CTN	240

H-403



Kg/PC	0.106
PC/CTN	200

H-13C



Kg/PC	0.069
PC/CTN	180

H-13D



Kg/PC	0.068
PC/CTN	180

H-101



Kg/PC	0.078
PC/CTN	200

H-102


Kg/PC	0.078
PC/CTN	200

H-301


Kg/PC	0.120
PC/CTN	80

H-401



Kg/PC	0.106
PC/CTN	200

P Series
PLASTICS




Unit : mm

P-1




Kg/PC	0.003
PC/CTN	400

P-1A



Kg/PC	0.003
PC/CTN	400

P-2




Kg/PC	0.009
PC/CTN	200

P-2A




Kg/PC	0.017
PC/CTN	100

P-3




Kg/PC	0.005
PC/CTN	300

P-4




Kg/PC	0.005
PC/CTN	300

P-5




Kg/PC	0.003
PC/CTN	500

P-6




Kg/PC	0.006
PC/CTN	150

P-7



Kg/PC	0.010
PC/CTN	200

P-8




Kg/PC	0.005
PC/CTN	300

PLASTICS

P-9



P-10

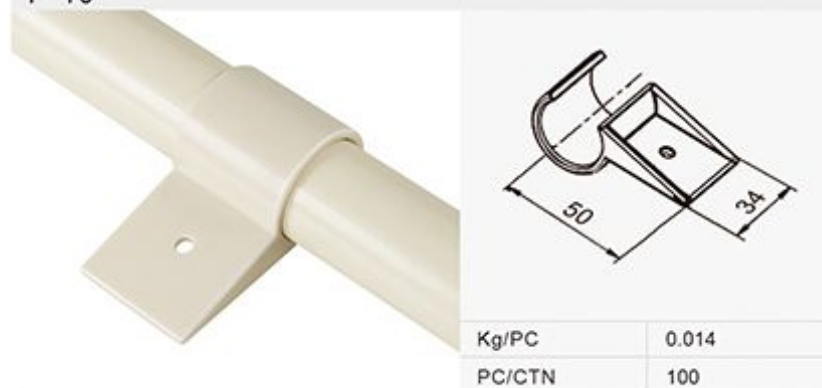

P-11




P-13




P-14




P-L1

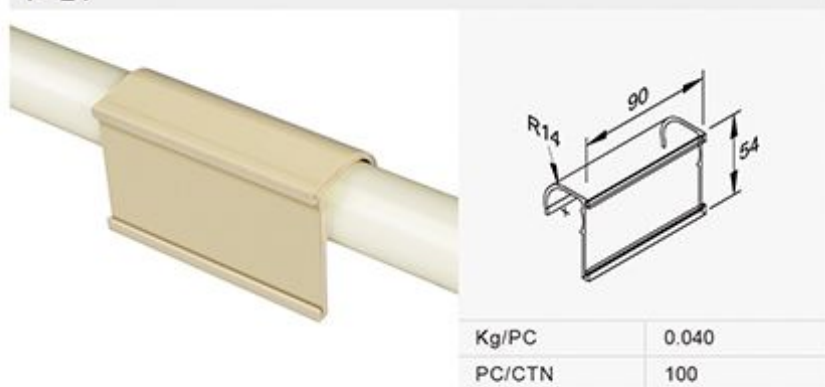


P-L1A

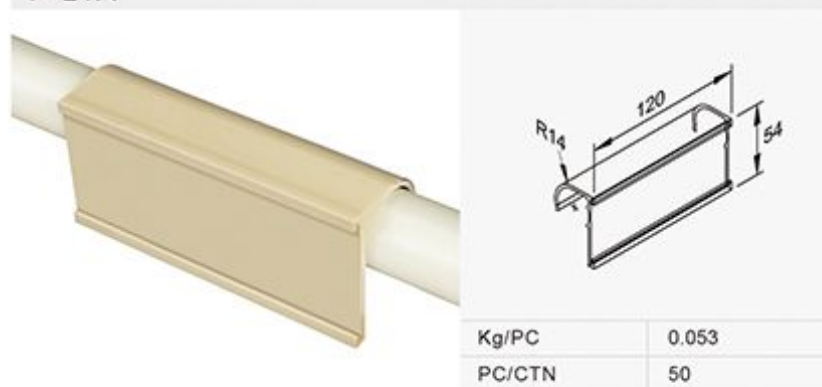


P-L2

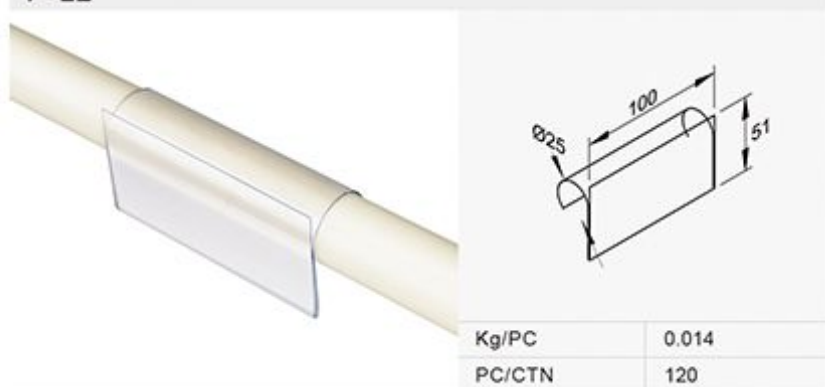


P-L2A

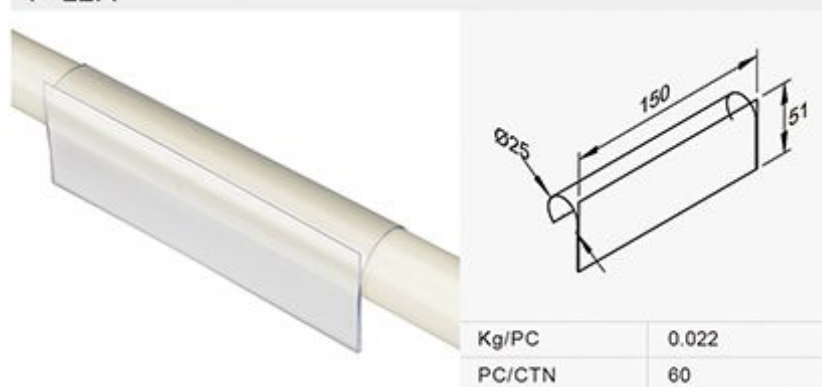


Unit : mm

P-L2B



Kg/PC	0.013
PC/CTN	100

P-L2C



Kg/PC	0.020
PC/CTN	60

P-L2D



Kg/PC	0.026
PC/CTN	50

P-L3



Kg/PC	0.006
PC/CTN	1000

P-L3A



Kg/PC	0.009
PC/CTN	700

P-L3B



Kg/PC	0.088
PC/CTN	100

P-L3C


Kg/PC	0.045
PC/CTN	150

P-L3D


Kg/PC	0.029
PC/CTN	700

P-L4


Kg/PC	0.045
PC/CTN	150




R Series
ROLLER TRACKS

Unit : mm


RH-28H1




RH-28H2

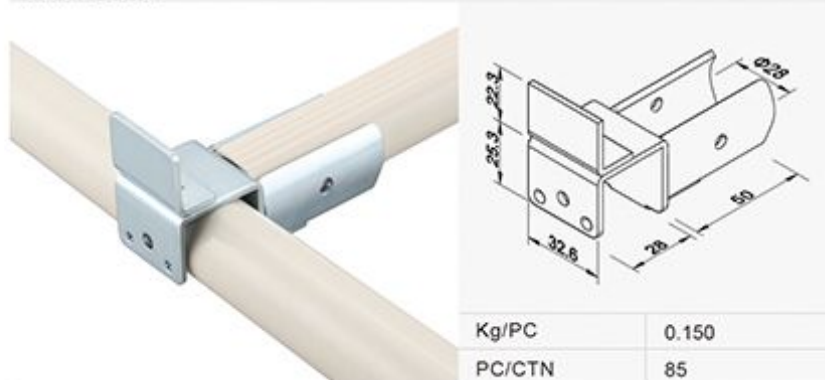


RH-28H3

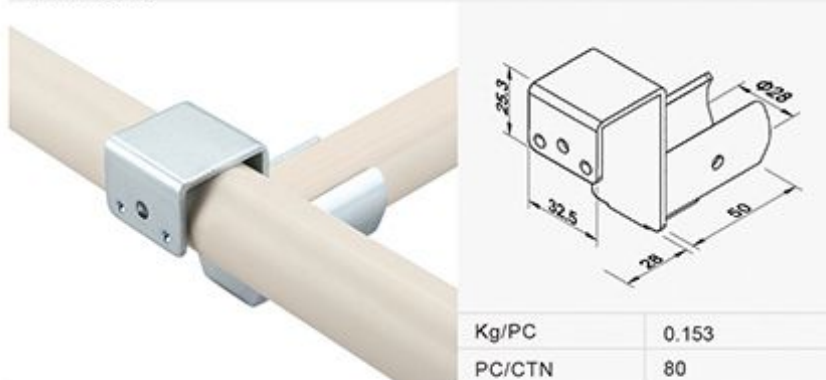


RH-28H4B

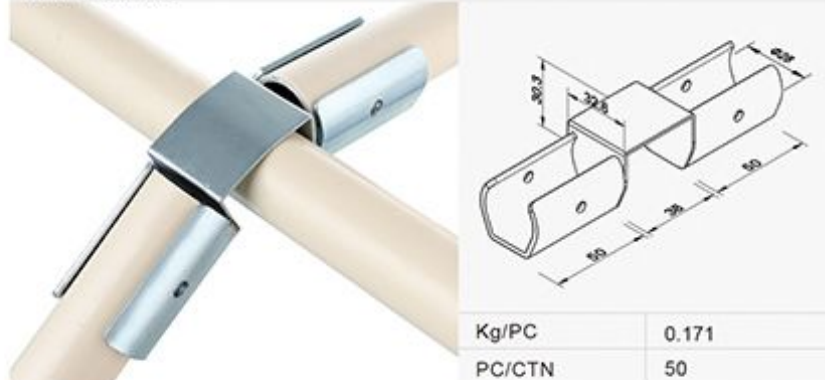

RH-28H5

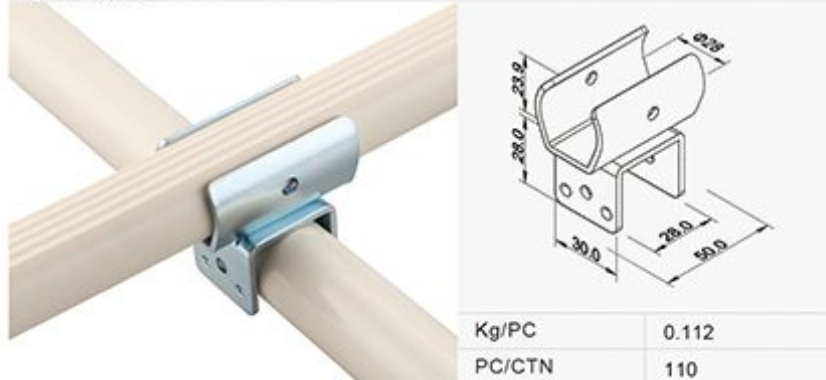


RH-28H5B

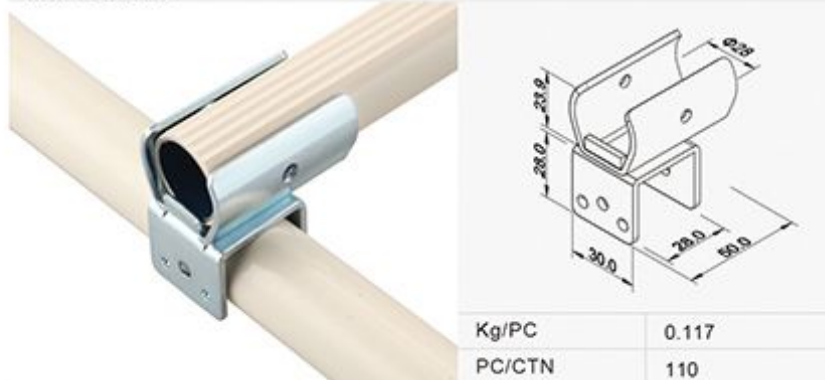

ROLLER TRACKS


SURFACE : ● WZ

R-3533 (white)




Kg/m	0.810
m/PC	4
m/BDL	40

R-3533 (yellow)




Kg/m	0.810
m/PC	4
m/BDL	40

RH-35H1




Kg/PC	0.167
PC/CTN	70

RH-35H2A




Kg/PC	0.211
PC/CTN	45

RH-35H3A




Kg/PC	0.191
PC/CTN	55

RH-35H5




Kg/PC	0.137
PC/CTN	60


Unit : mm

R-4036



Kg/m	1.100
m/PC	4
m/BDL	40

R-4036A


Kg/m	1.100
m/PC	4
m/BDL	40

R-4036ESD



Kg/m	1.100
m/PC	4
m/BDL	40

R-4036ESDA



Kg/m	1.100
m/PC	4
m/BDL	40

R-4045A



Kg/m	1.100
m/PC	4
m/BDL	40

R-4022


Kg/m	1.180
m/PC	4
m/BDL	40

R-4040


Kg/m	1.180
m/PC	4
m/BDL	40



R-4040A


Kg/m	1.180
m/PC	4
m/BDL	40

ROLLER TRACKS


SURFACE : ● WZ

RH-40H1

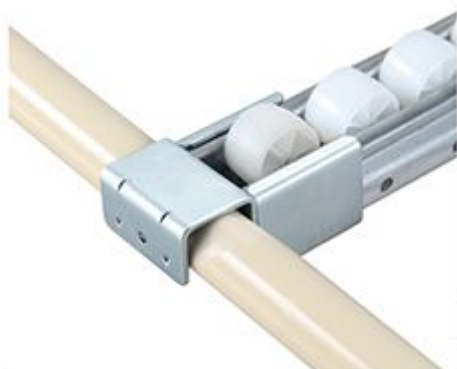



Kg/PC	0.182
PC/CTN	45

RH-40H2A




Kg/PC	0.234
PC/CTN	45

RH-40H3

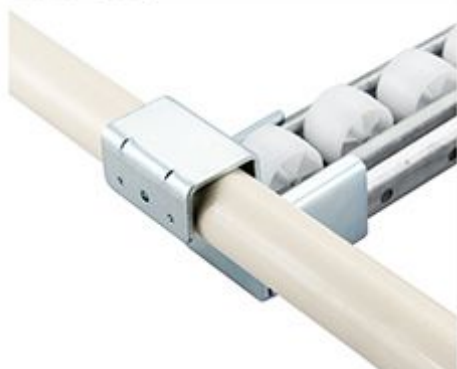


Kg/PC	0.208
PC/CTN	40

RH-40H3A




Kg/PC	0.220
PC/CTN	35

RH-40H4




Kg/PC	0.350
PC/CTN	30

RH-40H4A




Kg/PC	0.290
PC/CTN	25

RH-40H4B




Kg/PC	0.240
PC/CTN	25

RH-40H5




Kg/PC	0.164
PC/CTN	50

RH-40H6




Kg/PC	0.272
PC/CTN	50

RH-40H6A




Kg/PC	0.320
PC/CTN	20


Unit : mm

RH-40BH1



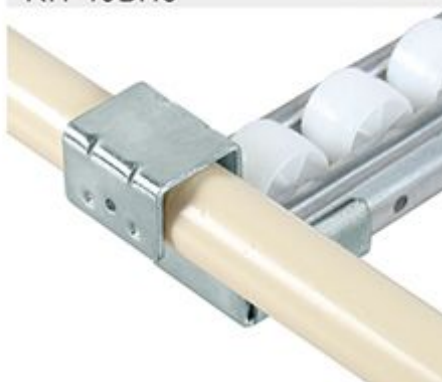
Kg/PC	0.141
PC/CTN	65

RH-40BH2A



Kg/PC	0.193
PC/CTN	45

RH-40BH2B



Kg/PC	0.167
PC/CTN	60

RH-40BH3



Kg/PC	0.167
PC/CTN	60

RH-40BH3A



Kg/PC	0.180
PC/CTN	55

RH-40BH4



Kg/PC	0.270
PC/CTN	35

RH-40BH4B



Kg/PC	0.190
PC/CTN	40

RH-40BH5


Kg/PC	0.120
PC/CTN	100

RH-40BH6


Kg/PC	0.180
PC/CTN	85


RH-40BH6A


Kg/PC	0.230
PC/CTN	40

ROLLER TRACKS


SURFACE : ● WZ

RH-4040H1




Kg/PC	0.220
PC/CTN	45

RH-4040H2A




Kg/PC	0.272
PC/CTN	40

RH-4040H3




Kg/PC	0.250
PC/CTN	35

RH-4040H4




Kg/PC	0.370
PC/CTN	20

RP-40A



Kg/m	0.980
m/PC	4
m/BDL.	40


RP-40B



Kg/m	0.660
m/PC	4
m/BDL.	40


Unit : mm

R-6016




Kg/m	1.350
m/PC	4
m/BDL	28

R-6016ESD




Kg/m	1.350
m/PC	4
m/BDL	28

RH-6016H1




Kg/PC	0.240
PC/CTN	50

RH-6016H2A




Kg/PC	0.320
PC/CTN	30

RH-6016H3




Kg/PC	0.273
PC/CTN	40

RH-6016H3A




Kg/PC	0.290
PC/CTN	35

RH-6016H5




Kg/PC	0.167
PC/CTN	60

RH-6016H6




Kg/PC	0.280
PC/CTN	50

RH-6016H6A



Kg/PC	0.332
PC/CTN	25

RH-6016BH1



Kg/PC	0.220
PC/CTN	50


ROLLER TRACKS

SURFACE : ● WZ


RH-6016BH2A



RH-6016BH3

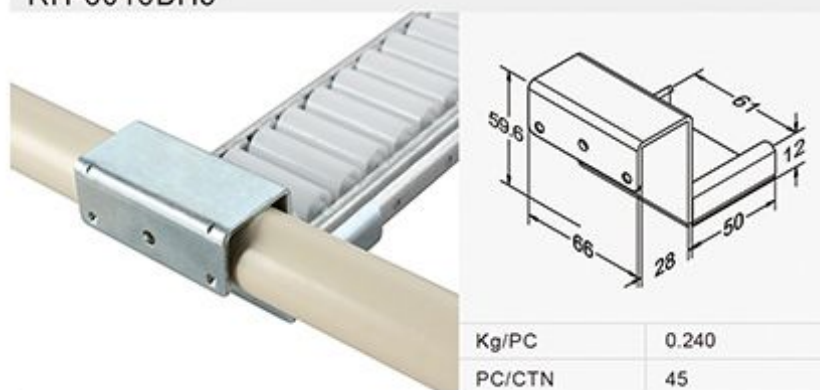


RH-6016BH3A

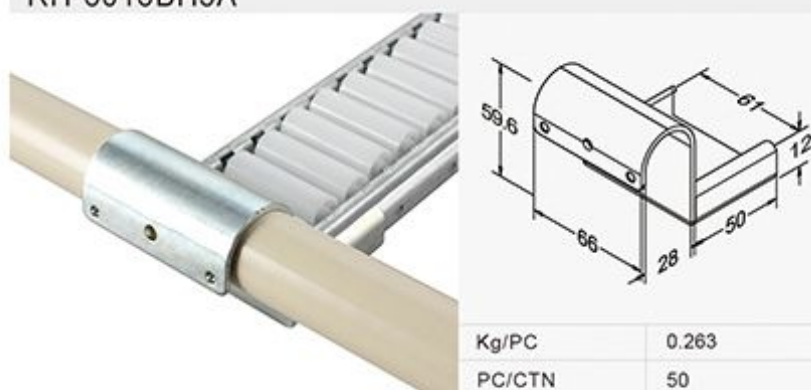


RH-6016BH5




RH-6016BH6

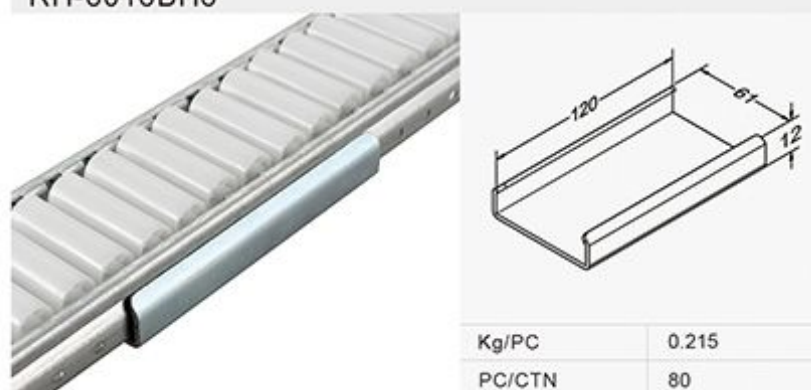


RH-6016BH6A

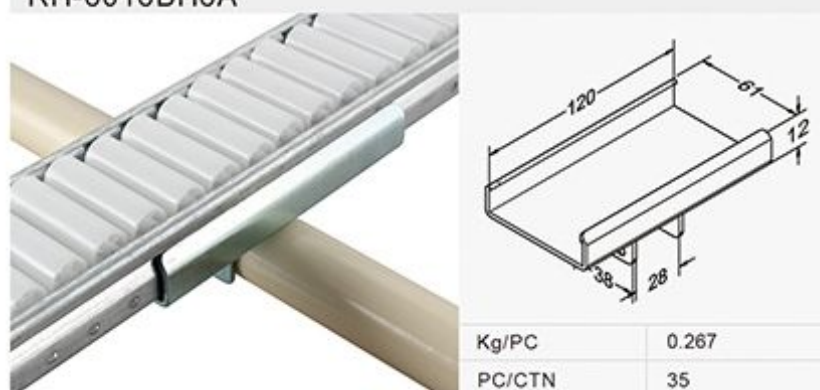


R-6032

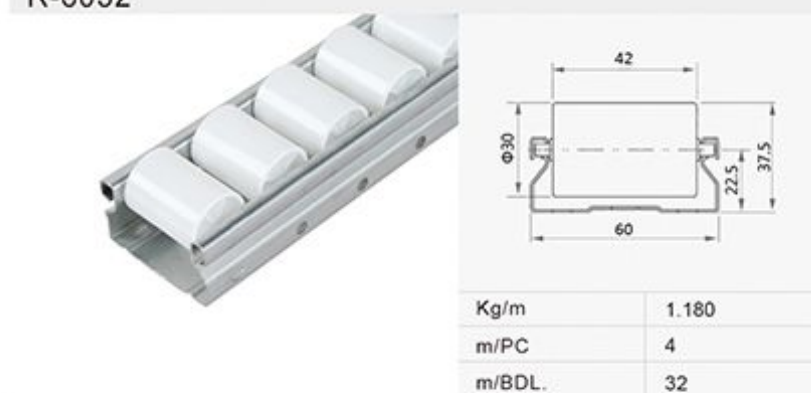


RH-6032H1

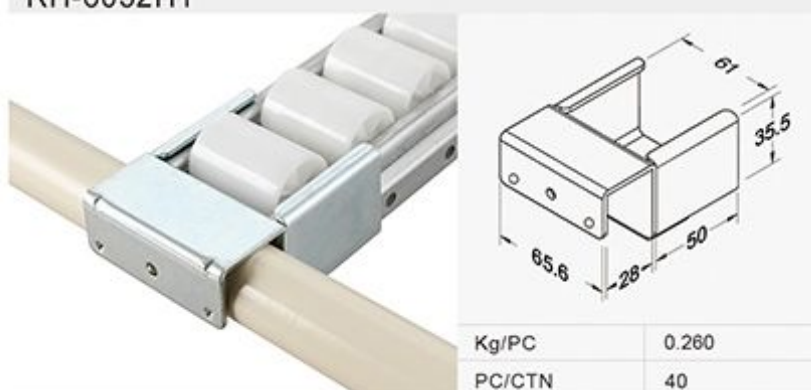


RH-6032H2A

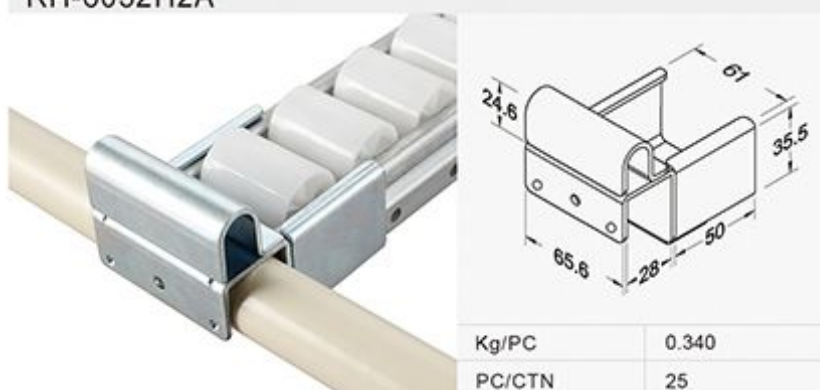


Unit : mm

R-8550


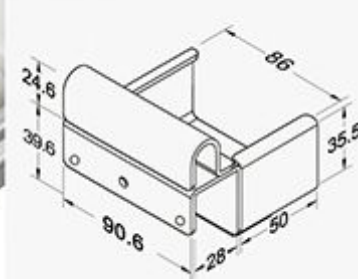
Kg/m	2.380
m/PC	4
m/BDL.	20

R-8525



Kg/m	2.650
m/PC	4
m/BDL.	20

RH-85H1



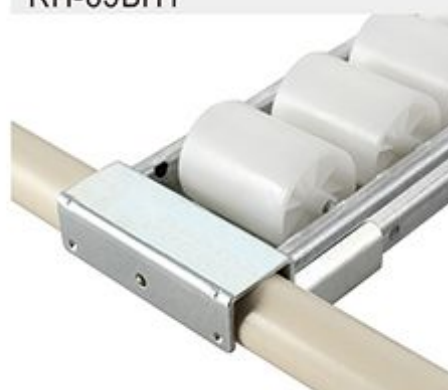
Kg/PC	0.340
PC/CTN	25

RH-85H2A



Kg/PC	0.403
PC/CTN	20

RH-85H5



Kg/PC	0.206
PC/CTN	20

RH-85BH1


Kg/PC	0.303
PC/CTN	30

RH-85BH2A


Kg/PC	0.366
PC/CTN	20

RH-85BH5



Kg/PC	0.169
PC/CTN	20



F Series

METAL ACCESSORIES

F-1




Kg/PC	0.158
PC/CTN	50

F-2




Kg/PC	0.198
PC/CTN	20

F-3




Kg/PC	0.006
PC/CTN	800

F-3A




Kg/PC	0.001
PC/CTN	10000

F-3B



Kg/PC	0.020
PC/CTN	300

F-3C



Kg/PC	0.020
PC/CTN	300

F-4




Kg/PC	0.020
PC/CTN	300

F-4A (Use with F-10/F-10A/F-21)




Kg/PC	0.070
PC/CTN	150

F-5




Kg/PC	0.026
PC/CTN	200

F-6




Kg/PC	0.104
PC/CTN	130


Unit : mm

F-7



Kg/PC	0.079
PC/CTN	240

F-8



Kg/PC	0.082
PC/CTN	240

F-9



Kg/PC	0.013
PC/CTN	800

F-9A



Kg/PC	0.013
PC/CTN	800

F-10 (Use with F-4A/F-10A/F-21)



Kg/PC	0.072
PC/CTN	90

F-10A (Use with F-4A/F-10/F-21)



Kg/PC	0.106
PC/CTN	75

F-10B (Use with F-4A/F-10/F-21)


Kg/PC	0.065
PC/CTN	75

F-11


Kg/PC	0.108
PC/CTN	120

F-11A


Kg/PC	0.109
PC/CTN	120

F-12A/F-12B/F-12C



Part No.	F-12A	F-12B	F-12C
L	235	335	435
Kg/PC	0.183	0.225	0.255
PC/CTN	40	30	25

METAL ACCESSORIES




SURFACE : ●BK ●WZ

F-13A/F-13B/F-13C/F-13D




Part No.	F-13A	F-13B	F-13C	F-13D
L	60	100	150	200
Kg/PC	0.039	0.046	0.059	0.070
PC/CTN	350	230	180	150

F-14




Kg/PC	0.188
PC/CTN	60

F-15




Kg/PC	0.145
PC/CTN	75

F-16




Kg/PC	0.230
PC/CTN	130

F-17




Kg/PC	0.275
PC/CTN	25

F-18



Kg/PC	0.060
PC/CTN	120

F-18A




Kg/PC	0.060
PC/CTN	120

F-19




Kg/PC	0.015
PC/CTN	200

F-20



Kg/PC	0.037
PC/CTN	500

F-21 (Use with F-4A/F-10/F-10A)



Kg/PC	0.130
PC/CTN	80

Unit : mm


F-22



F-25A



F-25B

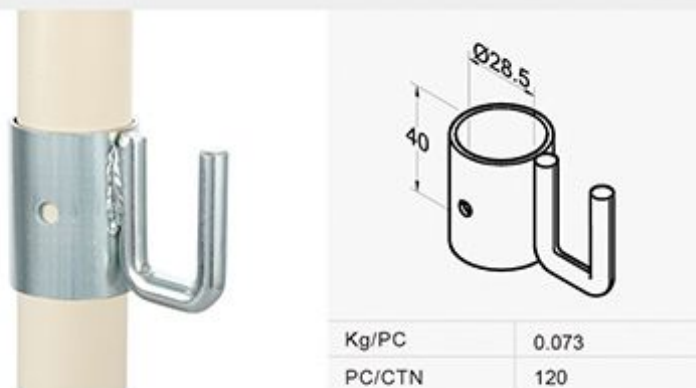

F-25C



F-26



L Series LEVELING FEET




LEVELING FEET




SURFACE : ● WZ

L-1




Kg/PC	0.043
PC/CTN	180

L-2




Kg/PC	0.052
PC/CTN	140

L-2A




Kg/PC	0.068
PC/CTN	130

L-3




Kg/PC	0.071
PC/CTN	200

L-3A




Kg/PC	0.104
PC/CTN	130

L-3B




Kg/PC	0.100
PC/CTN	120

L-3C




Part No.	L-3CCP10	L-3CCP12
Kg/PC	0.191	0.191
PC/CTN	100	100

L-3D




Kg/PC	0.074
PC/CTN	200

L-4



Kg/PC	0.094
PC/CTN	120


L-4A



Kg/PC	0.129
PC/CTN	80


Unit : mm

L-4B




Kg/PC	0.125
PC/CTN	85

L-4C




Part No.	L-4CCP10	L-4CCP12
Kg/PC	0.215	0.215
PC/CTN	70	70

L-4D




Kg/PC	0.094
PC/CTN	120

L-4E




Kg/PC	0.105
PC/CTN	100

L-4F




Kg/PC	0.180
PC/CTN	100

L-5




Kg/PC	0.033
PC/CTN	200

L-6




Kg/PC	0.073
PC/CTN	120

L-6A




Kg/PC	0.083
PC/CTN	140

L-6B



Kg/PC	0.112
PC/CTN	100

L-7




Kg/PC	0.395
PC/CTN	10

LEVELING FEET



SURFACE : ● WZ

L-8



Kg/PC	0.460
PC/CTN	15

N Series
FASTENERS



Unit : mm

N-1



Part No.	Desc.	Surface	Kg/PC	PC/CTN	Apply
N-1M6BZ-L	Nut	BZ	0.002	5400	Bolt
N-1M6WZ-L		WZ			
N-1EN14BZ-L	Inch Nut	BZ	0.002	5400	Inch Bolt
N-1EN14WZ-L		WZ			

N-2



Part No.	Desc.	Surface	Kg/PC	PC/CTN	Apply
N-2M625BZ	Bolt	BZ	0.007	2700	Nut
N-2M625WZ		WZ			
N-2M625SS	SS Bolt	SS	0.007	2700	SS Nut

N-2 Inch



Part No.	Desc.	Surface	Kg/PC	PC/CTN	Apply
N-2EN1425BZ	Inch Bolt	BZ	0.007	2700	Inch Nut
N-2EN1425WZ		WZ			

N-2



Part No.	Desc.	Surface	Kg/PC	PC/CTN	Apply
N-2M612BZ	Bolt	BZ	0.005	4000	Nut
N-2M612WZ		WZ			

N-3



Part No.	Desc.	Surface	Kg/PC	PC/CTN	Apply
N-3M840WZ-N	Bolt	WZ	0.017	1200	M8 Nut

N-6



Part No.	Desc.	Surface	Kg/PC	PC/CTN	Apply
N-6M8WZ-N	Nut	WZ	0.002	8000	M8 Bolt

N-8A



Part No.	Classification	Application	Kg/PC	PC/CTN	Apply
N-8ACP10M10WZ-L	Coated Pipe	Φ28 x T0.9	0.075	350	Φ23.8
N-8ACP10M12WZ-L		Φ28 x T0.9			Φ23.8
N-8ACP12M12WZ-L		Φ28 x T1.1			Φ23.4
N-8ASUS08M12WZ-L	SUS Pipe	Φ28 x T0.7	0.084	320	Φ26.4
N-8ASUS10M10WZ-L		Φ28 x T0.9			Φ26.0
N-8ASUS10M12WZ-L		Φ28 x T0.9			Φ26.0
N-8ASUS12M10WZ-L		Φ28 x T1.1	0.090		Φ25.6
N-8ASUS12M12WZ-L		Φ28 x T1.1			Φ25.6



C Series

CASTERS

CASTERS

C-3



PU

TPR

ESD

Part No.	 (mm)	Wheel Material	 (mm)	 (Kg)	 (mm)	 (mm)
C-3PU75RM12	75	PU	32	100	104	M12 X 60
C-3TPR75GM12		TPR				
C-3ESD75BM12		ESD				
C-3PU100RM12	100	PU	32	130	130	M12 X 60
C-3TPR100GM12		TPR				
C-3ESD100BM12		ESD				

C-4



PU

TPR

ESD

TPR ESD

Part No.	 (mm)	Wheel Material	 (mm)	 (Kg)	 (mm)	 (mm)
C-4PU75RM12	75	PU	32	100	104	M12 X 60
C-4TPR75GM12		TPR				
C-4ESD75BM12		ESD				
C-4TPRES75GM12		TPR ESD				
C-4PU100RM12	100	PU	32	130	130	M12 X 60
C-4TPR100GM12		TPR				
C-4ESD100BM12		ESD				
C-4TPRES100GM12		TPR ESD				

C-4A



TPR

TPR ESD

Part No.	 (mm)	Wheel Material	 (mm)	 (Kg)	 (mm)	 (mm)
C-4ATPR75GM12	75	TPR	32	100	104	M12 X 60
C-4ATPRES75GM12		TPR ESD				
C-4ATPR100GM12	100	TPR	32	130	130	M12 X 60
C-4ATPRES100GM12		TPR ESD				

Unit : mm

C-5


PU



TPR

Part No.	 (mm)	Wheel Material	 (mm)	 (Kg)	 (mm)	 (mm)	 (mm)
C-5PU75R	75	PU	32	100	103	95 X 67	73 X 45
C-5TPR75G		TPR					
C-5PU100R	100	PU	32	130	128	95 X 67	73 X 45
C-5TPR100G		TPR					
C-5PU125R	125	PU	32	140	157	95 X 67	73 X 45
C-5TPR125G		TPR					

C-6


PU



TPR

Part No.	 (mm)	Wheel Material	 (mm)	 (Kg)	 (mm)	 (mm)	 (mm)
C-6PU75R	75	PU	32	100	103	95 X 67	73 X 45
C-6TPR75G		TPR					
C-6PU100R	100	PU	32	130	128	95 X 67	73 X 45
C-6TPR100G		TPR					
C-6PU125R	125	PU	32	140	157	95 X 67	73 X 45
C-6TPR125G		TPR					

C-7


PU



TPR

Part No.	 (mm)	Wheel Material	 (mm)	 (Kg)	 (mm)	 (mm)	 (mm)
C-7PU75R	75	PU	32	100	103	95 X 67	73 X 45
C-7TPR75G		TPR					
C-7PU100R	100	PU	32	130	128	95 X 67	73 X 45
C-7TPR100G		TPR					
C-7PU125R	125	PU	32	140	157	95 X 67	73 X 45
C-7TPR125G		TPR					

C-8


PU



TPR

Part No.	 (mm)	Wheel Material	 (mm)	 (Kg)	 (mm)	 (mm)	 (mm)
C-8PU100R	100	PU	50	290	143	114 X 100	73 X 45
C-8TPR100G		TPR					
C-8PU125R	125	PU	50	360	165	114 X 100	73 X 45
C-8TPR125G		TPR					
C-8PU150R	150	PU	50	420	190	114 X 100	73 X 45
C-8TPR150G		TPR					

C-9


PU



TPR

Part No.	 (mm)	Wheel Material	 (mm)	 (Kg)	 (mm)	 (mm)	 (mm)
C-9PU100R	100	PU	50	290	143	114 X 100	73 X 45
C-9TPR100G		TPR					
C-9PU125R	125	PU	50	360	165	114 X 100	73 X 45
C-9TPR125G		TPR					
C-9PU150R	150	PU	50	420	190	114 X 100	73 X 45
C-9TPR150G		TPR					

C-10


PU



TPR

Part No.	 (mm)	Wheel Material	 (mm)	 (Kg)	 (mm)	 (mm)	 (mm)
C-10PU100R	100	PU	50	290	143	114 X 100	73 X 45
C-10TPR100G		TPR					
C-10PU125R	125	PU	50	360	165	114 X 100	73 X 45
C-10TPR125G		TPR					
C-10PU150R	150	PU	50	420	190	114 X 100	73 X 45
C-10TPR150G		TPR					

O Series

TOOLS



Unit : mm

O-2


Ø	5 mm
L1	123 mm
L2	16 mm
Kg/PC	0.103
PC/CTN	20

O-3/O-3A


Cutting Range	3-32 mm
Set	1 X O-3
Optional Parts	2 X O-3A
Kg/PC	0.417 / 0.019
PC/CTN	12


O-4


Cutting Range	Φ 6 - Φ 40 mm
Kg/PC	0.230
PC/CTN	32
Tube inside and outside trimming knife.	

O-5/O-5A


Packaging (included)	1xO-5 ordinary trim-ming blade
	1xO-5A high strength trimming blade
Kg/PC	0.060 / 0.021

About RELL

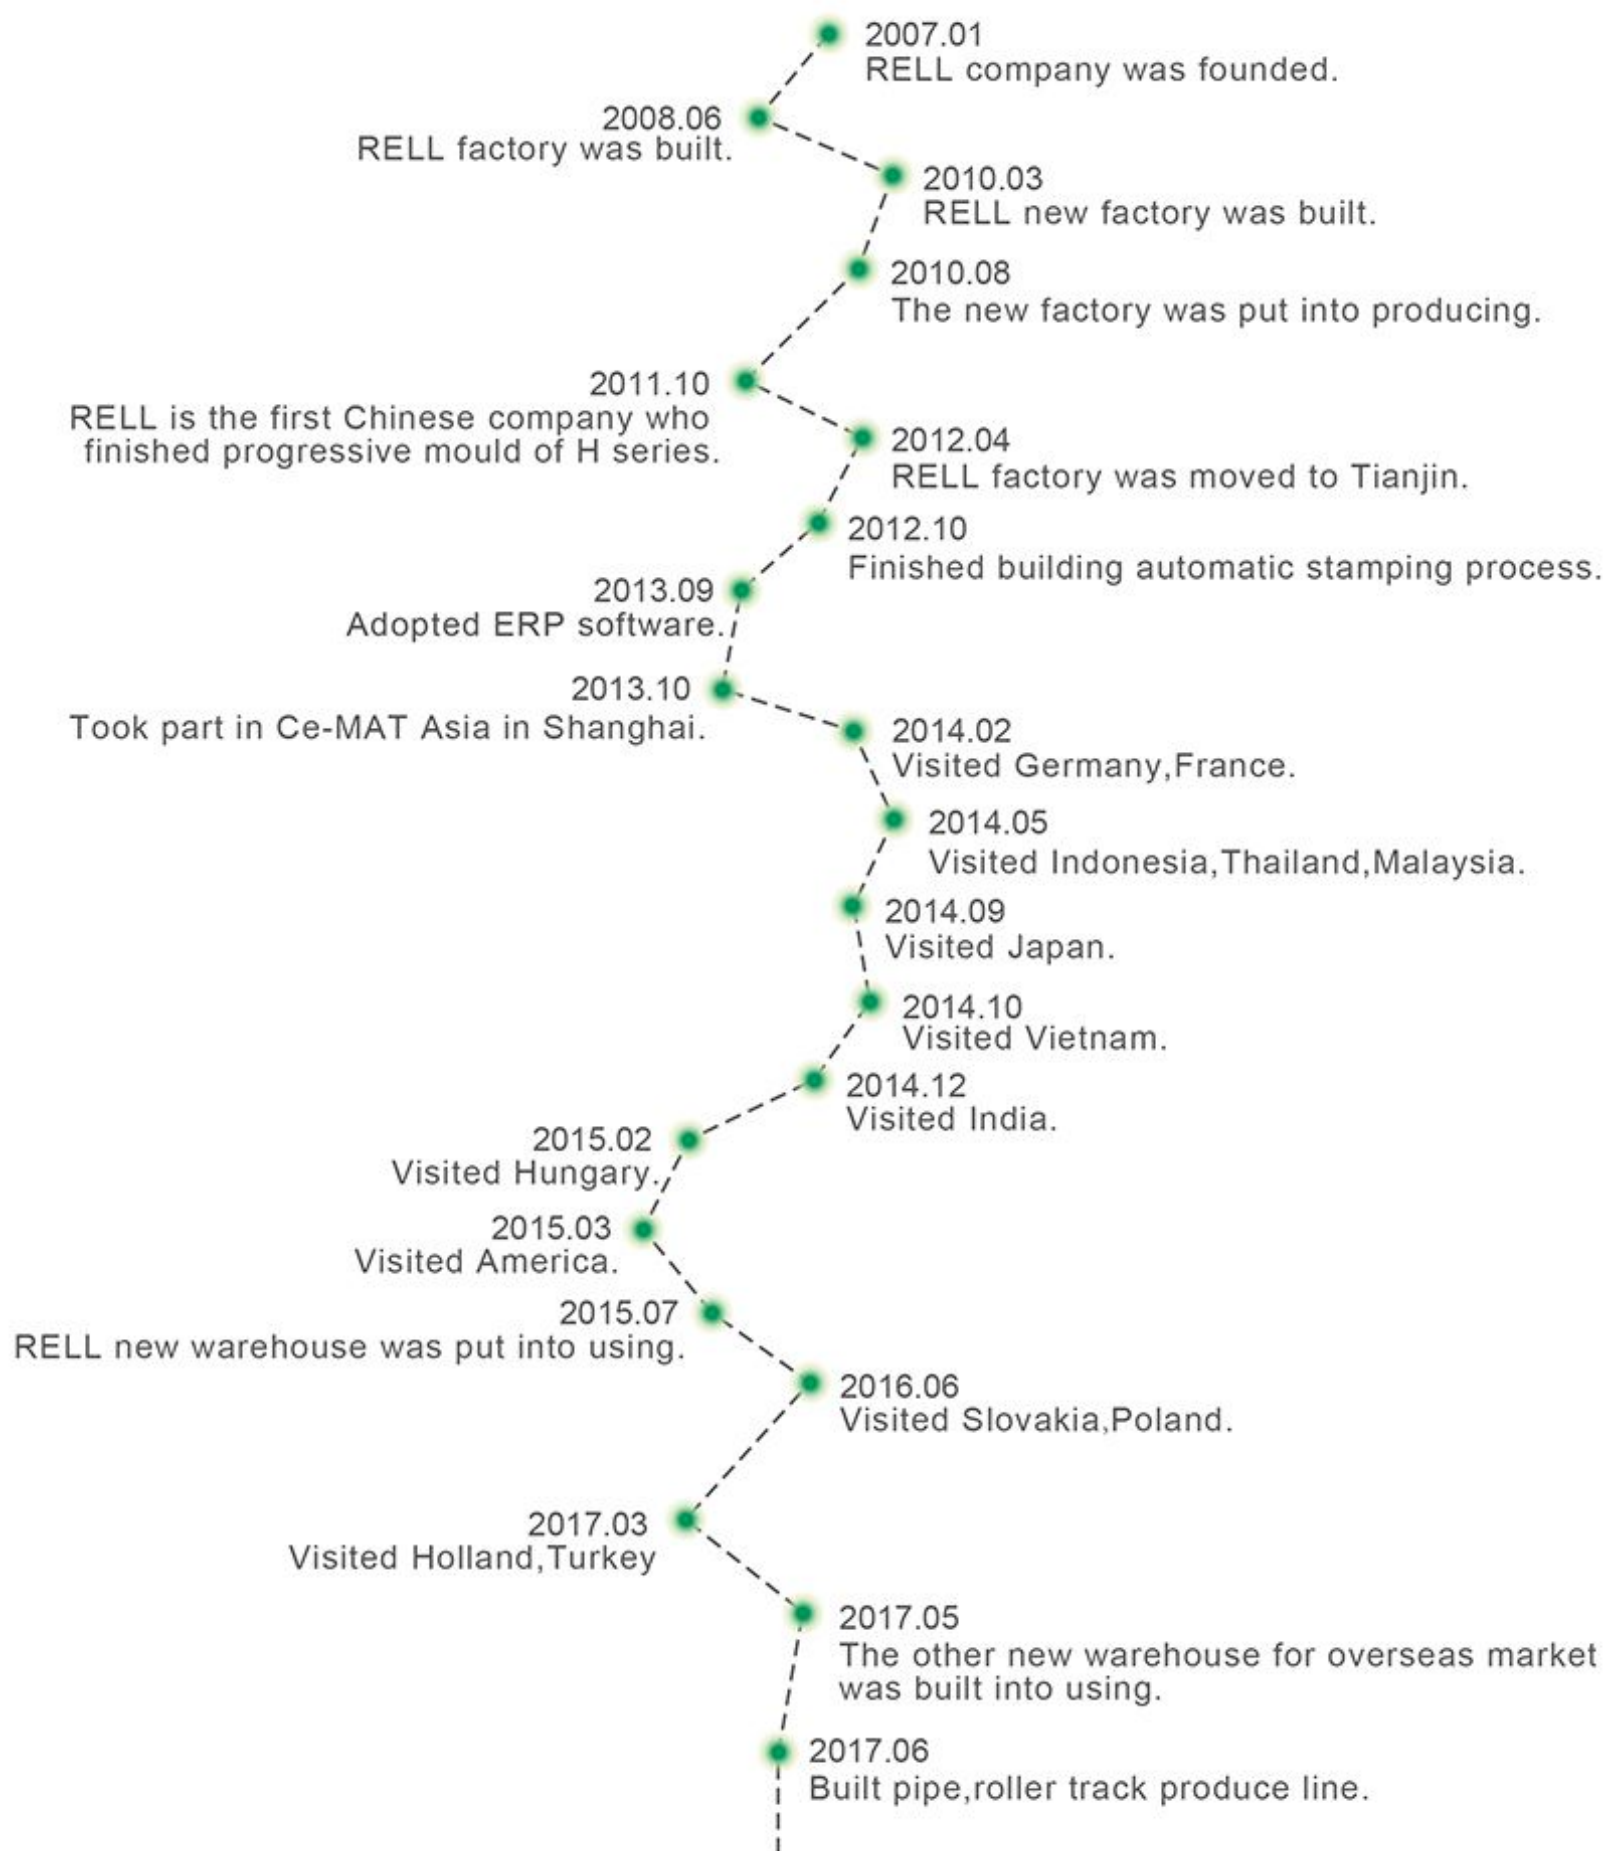





www.rell-tech.com